


 件 : -01-1 - -07- 20

 : 02

 : 2018.11.21

1 3

PD60-TO25-BL-2pin Series

Features:

Applications:

Specifications:

Absolute Maximum Ratings:

Parameter	Symbol	Min.	Max.	Unit
		—	20	
		—	5	
		—	5	
		-40	+85	°C
		-40	+85	°C
	—	—	260	°C
	—	—	10	


Characteristics: (Ta=25°C unless otherwise noted)


Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
		—	—	60	—	
		5	3	—	—	
	1310	5	0.8	0.	—	/
	1550	5	0.	0.5	—	/
		5	—	0.2	1.0	
		5 , 1	—	0.45	0.5	
		—	1100	—	1620	
		—	—	-5	—	



件 : -01-1 - -07- 20 : 02 : 2018.11.21 2 3

Mechanical Dimension and Pin Assignment:

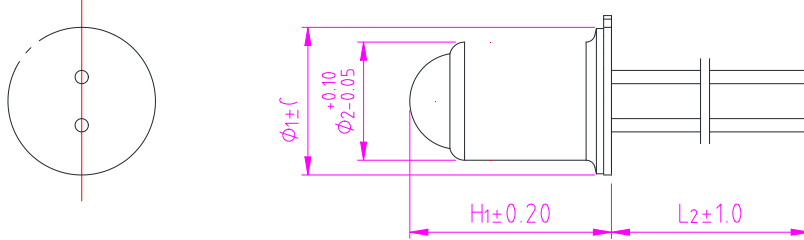



件 : -01-1 - -07- 20 : 02 : 2018.11.21 3 3

Standard Product List:

	$\Phi_1()$	$\Phi_2()$	$i_1()$	$i_1()$	$i_2()$	
60- 25- ()-2 -	2.5	1.6	3.35	12.7	12.7	
60- 25- ()-2 -	2.5	1.6	3.35	14.0	14.0	
60- 25- ()-2 -	2.5	1.6	3.35	15.52	17.52	
60- 25- ()-2 -	2.5	1.6	2.2	12.7	12.7	
60- 25- ()-2 -	2.5	1.6	2.2	14.0	14.0	
60- 25- ()-2 -	2.5	1.6	2.2	15.52	17.52	



Order Information:

PD60 - - - -

<u> </u> : 25	<u> </u> : (): ():	<u> </u> : 2	<u> </u> : : : :
---------------------------	---	--------------------------	------------------------------------

Statement:

-
-
.

Contact Information:

501-505

+86-5 2-38 8601, 38 8608, 5318000

+86-5 2-5703588

// . . .

// . . . +86-5 2-38 8601 +86-5 2-5703588