

件 : -01-19-A-07-A08: 01: 2018.9.171

PD300-TO46-BL Series

Features:

D C
C-B 1310 ; -B

Applications:



Specifications:

Absolute Maximum Ratings:

Parameter	Symbol	Min.	Max.	Unit
		—	20	
C		—	50	A
	A	—	30	
		-40	+85	°C
		-40	+85	°C
	—	—	260	°C
	—	—	10	

Characteristics: (Ta=25°C unless otherwise noted)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
A D	D	—	—	300	—	
B	B	=-10 B , , =5	400	600	—	
	@1310	=5	0.8	0.9	—	A/
	@1550	=5	0.9	0.95	—	A/
D C	D	=5	—	0.1	0.6	A
C C	C	=5 , =1	—	4.0	6.0	
		—	1100	—	1620	

:// . - .

: +86-592-3898601

: +86-592-5703588





件 : -01-19-A-07-A08


: 01

: 2018.9.17

2 3

		—	—	-5.0	—	
--	--	---	---	------	---	--

Mechanical Dimension and Pin Assignment:

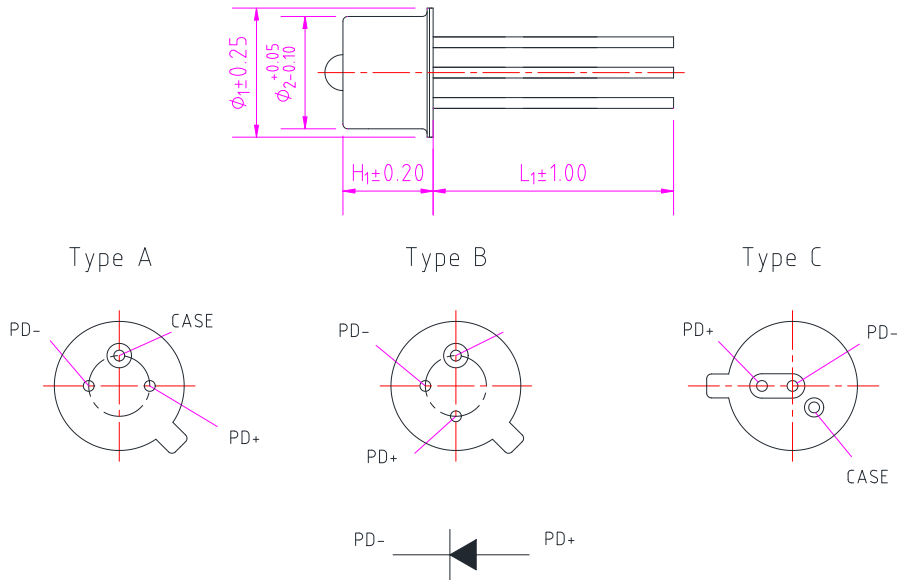

Standard Product List:

	Φ_1 ()	Φ_2 ()	l_1 ()	l_2 ()	
D300- 46-B ()-A	5.4	4.7	3.75	14	D
D300- 46-B ()-B	5.4	4.7	3.75	14	
D300- 46-B ()-C	5.4	4.7	3.75	14	
D300- 46-B ()-A	5.4	4.7	3.35	14	
D300- 46-B ()-B	5.4	4.7	3.35	14	
D300- 46-B ()-C	5.4	4.7	3.35	14	



Order Information:

PD300 - - - -

_____ :
46

C _____ :
B () :
B
B () :
B

_____ :
3
4

_____ A _____ :
A: A
B: B
C: C





件 : -01-19-A-07-A08 : 01 : 2018.9.17 3  3

Statement:

A - ,
A ;
A . A
A -

Contact Information:

A : 501-505 B , C ,
, C
: +86-592-3898601, 3898608, 5318000
+86-592-5703588
://

