



1.25Gbps 850nm PIN-TIA TO-CAN Series

Features:

- Bit Rate: 1.25Gbps.
- 850nm multimode.
- -40°C to 85°C Operation.
- High Sensitivity.

Applications:

- Digital Optical Communication.

Specifications:

Absolute Maximum Ratings:

Parameter	Symbol	Min.	Max.	Unit
Optical Input Power	P_{in}	—	3	dBm
Operating Temperature	Top	-40	+85	°C
Storage Temperature	Tstg	-40	+85	°C
Lead Solder Temperature	—	—	260	°C
Lead Solder Time	—	—	10	s


Characteristics: ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Supply Voltage	Vcc	—	3.0	3.3	3.6	V
Supply Current	Icc	Vcc=3.3V	23	25	35	mA
Wavelength Range	λ	Vcc=3.3V	830	850	860	nm
RSSI Offset Current	I_d	Vcc=3.3V	—	—	150	nA
Overload	OL	Vcc=3.3V	0	—	—	dBm
Sensitivity	Sen	1.25Gbps, PRBS7, 850nm, ER=10dB, BER=10E-10	—	-26	-23	dBm




Mechanical Dimension and Pin Assignment:

4pin

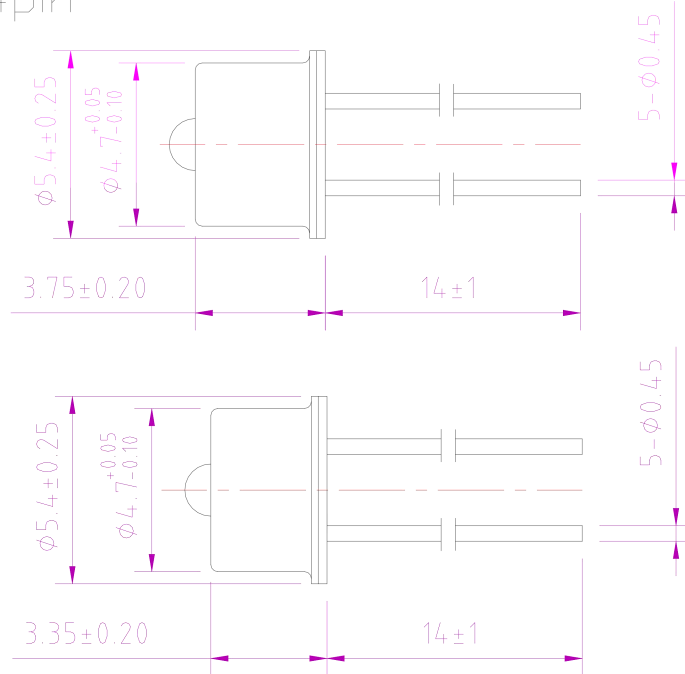


5pin

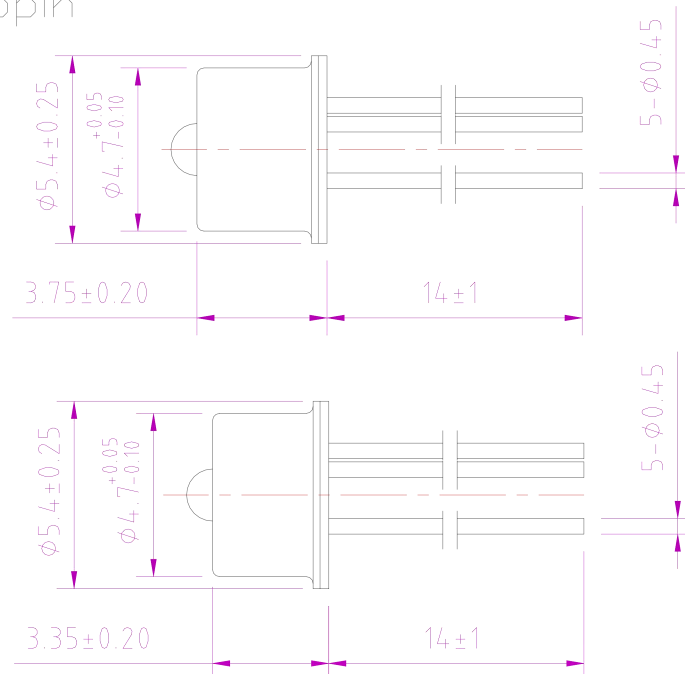



Pin Description:

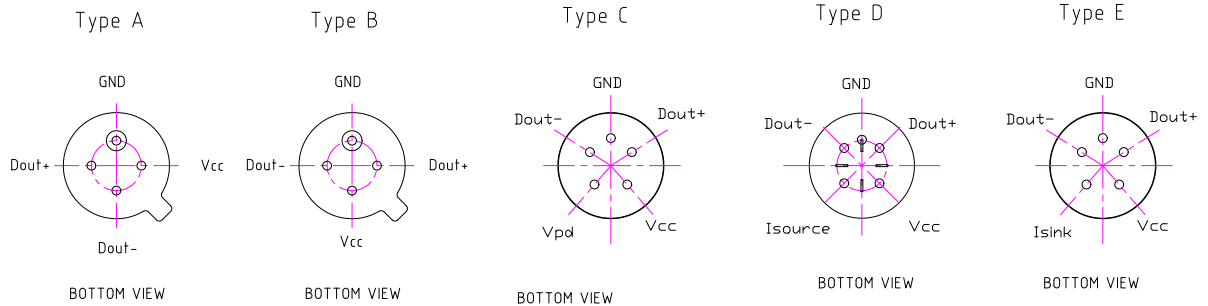

Order Information:

PT1.25G 850nm



<u>Header Type:</u> TO46	<u>Cap Type:</u> BL(3.5): H3.5 Ball Lens BL(3.1): H3.1 Ball Lens	<u>Numbers of Pin:</u> 4pin 5pin	<u>Pin Type:</u> Type A Type B Type C Type D Type E
-----------------------------	--	--	--

Statement:

SAN-U owns the authority for final explanation of all information contained in this document, which is subject to change without notice. All the information was obtained in particular environments; and SAN-U will not be responsible for the performance of the customers' actual operating environments. All information contained is only for the users' reference and shall not be considered as warranted characteristics. SAN-U will not be liable for damages arising directly or indirectly which from any use of the information contained in this document.

Contact Information:

Address: N501-505 Weiye Bldg., Xiamen Pioneering Park For Overseas Chinese Scholars, Xiamen, Fujian, China

Tel: +86-592-3898601, 3898608, 5318000

Fax: +86-592-5703588

Email: sales@san-u.com

<http://www.san-u.com>