



1.25Gbps 1310nm PIN-TIA TO-CAN Series

Features:

- Bit Rate: 1.25Gbps.
- Single +3.3V Power Supply.
- -40°C to 85°C Operation.
- InGaAs PIN Detector and TIA inside.

Applications:

- Digital Optical Communication.
- Optical LAN.

Specifications:

Absolute Maximum Ratings:

Parameter	Symbol	Min.	Max.	Unit
Optical Input Power	P_{in}	—	3	dBm
Operating Temperature	T_{op}	-40	+85	°C
Storage Temperature	T_{stg}	-40	+85	°C
Lead Solder Temperature	—	—	260	°C
Lead Solder Time	—	—	10	s

Characteristics: ($T_a=25^{\circ}\text{C}$ unless otherwise noted)


Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Unit
Supply Voltage	V_{cc}	—	3.0	3.3	3.6	V
Supply Current	I_{cc}	$V_{cc}=3.3\text{V}$	23	25	26	mA
Wavelength Range	λ	$V_{cc}=3.3\text{V}$	1260	1310	1620	nm
RSSI Offset Current	I_d	$V_{cc}=3.3\text{V}$	—	—	150	nA
Overload	OL	$V_{cc}=3.3\text{V}$	0	—	—	dBm
Sensitivity	Sen	1.25Gbps, PRBS7, 1310nm, ER=10dB, BER=10E-10	—	-28	-26	dBm



Key Materials


Materials	Part Number
PIN PD	0000020202
TIA	0000090011

Mechanical Dimension and Pin Assignment:

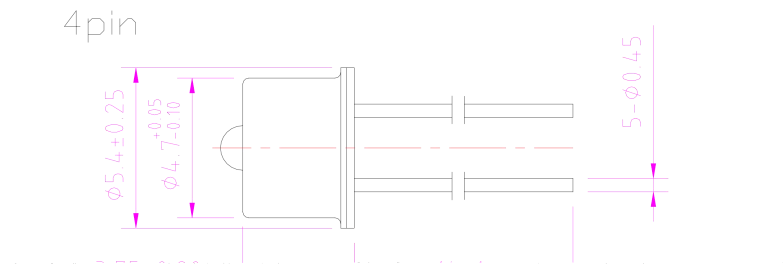



Pin Description:

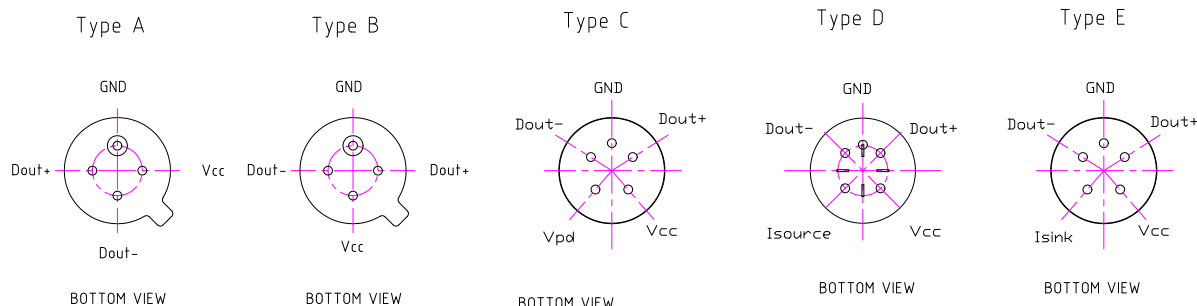

Order Information:



<p><u>Header Type:</u> TO46</p>	<p><u>Cap Type:</u> BL(3.5): H3.5 Ball Lens BL(3.1): H3.1 Ball Lens</p>	<p><u>Numbers of Pin:</u> 4pin 5pin</p>	<p><u>Pin Type:</u> Type A Type B Type C Type D Type E</p>
-------------------------------------	---	---	--

Statement:

SAN-U owns the authority for final explanation of all information contained in this document, which is subject to change without notice. All the information was obtained in particular environments; and SAN-U will not be responsible for the performance of the customers' actual operating environments. All information contained is only for the users' reference and shall not be considered as warranted characteristics. SAN-U will not be liable for damages arising directly or indirectly which from any use of the information contained in this document.

Contact Information:

Address: N501-505 Weiye Bldg., Xiamen Pioneering Park For Overseas Chinese Scholars, Xiamen, Fujian, China

Tel: +86-592-3898601, 3898608, 5318000

Fax: +86-592-5703588

Email: sales@san-u.com

<http://www.san-u.com>